





## Gancho ojo con traba de seguridad



Item No.	Working Load Limit tonnes*	For Grade 100 Chain mm	Dimensions (mm)						N.W. Kg
			K	P1	A	D	T	H	
X-044/S-06	1.4	6	80	23	20	10	17	19	0.3
X-044/S-07	2.5	7, 8	98	28	25	12	20	23	0.5
X-044/S-10	4.0	10	121	36	32	15	23	31	1.0
X-044/S-13	6.7	13	152	40	40	18	27	38	1.8
X-044/S-16	10.0	16	185	44	50	22	32	45	3.4
X-044/S-20	16.0	20	230	54	61	27	48	64	7.3
X-044/S-22	19.0	22	245	76	51	31	52	63	9.3
X-044/S-26	26.5	26	279	77	65	35	60	80	13.7
X-044/S-32	40.0	32	352	114	88	40	65	86	21.6

★ Coeficiente de seguridad 4:1

## Gancho horquilla con traba de seguridad




Item No.	Working Load Limit tonnes*	For Grade 100 Chain mm	Dimensions (mm)					N.W. Kg
			A	K	P1	T	H	
X-043/S-06	1.4	6	6	97	23	15	23	0.3
X-043/S-07	2.5	7, 8	9	98	27	18	22	0.6
X-043/S-10	4.0	10	11	122	34	24	30	1.2
X-043/S-13	6.7	13	14	147	44	30	37	2.3
X-043/S-16	10.0	16	17	166	48	39	42	3.8
X-043/S-20	16.0	20	24	207	57	48	64	8.7
X-043/S-22	19.0	22	25	217	73	52	61	9.6

★ Coeficiente de seguridad 4:1



## Eslabon maestro

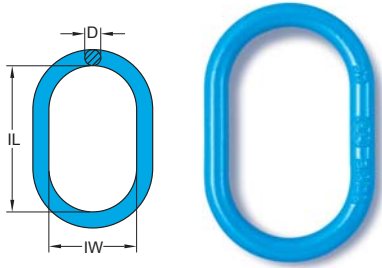


Item No.	CMT $\beta$ 0-45°	Para cadenas Grad0 100 (mm)		Dimensiones (mm)			Peso. Kg	
		ton*	1 Leg	2 Leg	IL	IW		D
		X-003-06	※ 1.7	6	--	100		60
X-003-0806	※ 4.5	7, 8	6	120	70	14	0.5	
X-003-1008	※ 7.2	10	7, 8	140	80	17	0.7	
X-003-13	※ 7.7	13	--	150	90	19	1.1	
X-003-1310	※ 10.5	13	10	160	95	22	1.5	
X-003-16	※ 15.0	16	--	190	110	25	2.8	
X-003-1613	※ 15.0	16	13	180	105	28	2.4	
X-003-19	※ 22.0	19, 20	--	200	120	30	3.5	
X-003-2216	※ 23.0	22	16	240	140	34	5.3	
X-003-26	※ 31.5	26	--	250	150	38	7.4	
X-003-2619	※ 35.5	26	19, 20	250	150	40	8.3	
X-003-3222	※ 48.0	32	22	300	180	45	12.7	

★ Forged Oblong Master Links.

Coefficiente de seguridad


## Eslabon de conexión

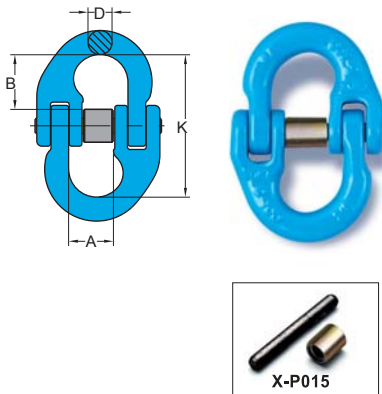

Item No.	CMT ton*	Para cadenas Grado100		Dimensiones (mm)			Peso. Kg
		mm	K	A	D	B	
		X-015-06	1.4	6	45	15	
X-015-07	2.5	7, 8	59	18	9	25	0.2
X-015-10	4.0	10	69	25	11	28	0.3
X-015-13	6.7	13	92	30	16	38	0.7
X-015-16	10.0	16	101	36	19	41	1.2
X-015-20	16.0	20	122	42	23	50	2.1
X-015-22	19.0	22	152	49	24	63	3.5
X-015-26	26.5	26	162	55	30	66	4.9
X-015-32	40.0	32	203	69	36	85	9.3

★ Coeficiente de seguridad 4:1

## Gancho con cierre automático

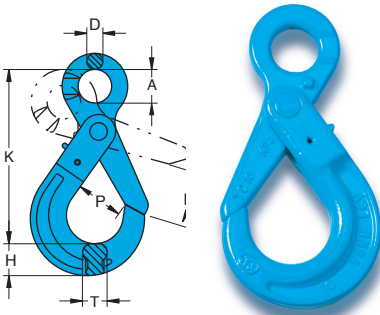

Item No.	CMT ton*	Para cadenas Grado100		Dimensiones (mm)					Peso. Kg
		mm	K	P	A	D	T	H	
		X-025-06	1.4	6	110	28	21	10	
X-025-07	2.5	7, 8	136	34	25	11	20	24	0.8
X-025-10	4.0	10	167	44	32	13	26	30	1.5
X-025-13	6.7	13	207	51	40	16	30	39	3.0
X-025-16	10.0	16	252	60	50	21	36	49	5.8
X-025-20	16.0	20	290	70	60	23	53	65	10.2
X-025-22	19.0	22	319	80	70	24	49	63	12.7
X-025-26	26.5	26	343	99	80	25	56	69	15.2

★ Coeficiente de seguridad 4:1