


## Grilletes

Con perno de seguridad

- Norma: Federal Specification RR-C-271D. Tipo 4A, Grado A Clase 2
- Forjados en acero al carbono y perno de aleación
- Tamaño y CMT se muestran en cada grillete
- Marca: YOKE
- Coeficiente de seguridad 6:1

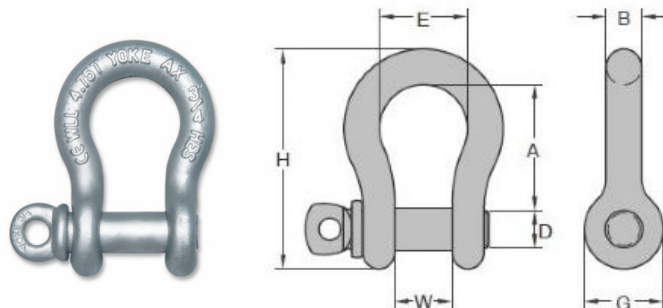

Item N°	Ø Nominal plg	CMT ton*	Dimensiones (plg)							Peso Kg
			A	B	D	E	G	H	W	
8-837-05	3/16	0.3	0.87	0.2	0.25	0.69	0.57	1.48	0.38	0,02
8-837-06	1/4	0.5	1.10	0.26	0.32	0.80	0.63	1.85	0.47	0,05
8-837-08	5/16	0.75	1.22	0.31	0.37	0.82	0.75	2.13	0.47	0,09
8-837-10	3/8	1	1.42	0.39	0.43	1.02	0.91	2.56	0.63	0,09
8-837-11	7/16	1.5	1.70	0.43	0.51	1.18	1.06	2.95	0.75	0,18
8-837-13	1/2	2	1.85	0.52	0.63	1.30	1.18	3.34	0.79	0,32
8-837-16	5/8	3.25	2.40	0.63	0.75	1.70	1.50	4.17	1.06	0,59
8-837-19	3/4	4.75	2.83	0.75	0.87	1.96	1.81	5.04	1.30	1,00
8-837-22	7/8	6.5	3.39	0.87	1.02	2.28	2.08	5.91	1.50	1,50
8-837-26	1	8.5	3.78	1.02	1.10	2.68	2.67	6.57	1.73	2,31
8-837-28	1 1/8	9.5	4.37	1.10	1.26	2.91	2.68	7.52	1.81	3,18
8-837-32	1 1/4	12	4.76	1.26	1.42	3.30	2.99	8.07	2.12	4,49
8-837-36	1 3/8	13.5	5.28	1.42	1.50	3.62	3.30	9.13	2.32	6,30
8-837-38	1 1/2	17	5.75	1.50	1.77	3.90	3.62	10.00	2.36	8,07
8-837-45	1 3/4	25	7.00	1.85	2.00	5.00	4.17	12.32	2.87	16,28
8-837-50	2	35	7.76	2.09	2.24	5.75	4.80	13.66	3.27	23,13

Item N°	Ø Nominal mm	CMT ton*	Dimensiones (mm)							Peso Kg
			A	B	D	E	G	H	W	
8-837-05	5	0.3	22	5	6	17	15	38	10	0.021
8-837-06	6	0.5	28	6.5	8	20	16	47	12	0.05
8-837-08	8	0.75	31	8	9.5	21	19	54	12	0.1
8-837-10	10	1	36	10	11	26	23	65	16	0.1
8-837-11	11	1.5	43	11	13	30	27	75	19	0.2
8-837-13	13	2	47	13	16	33	30	85	20	0.3
8-837-16	16	3.25	61	16	19	43	38	106	27	0.6
8-837-19	19	4.75	72	19	22	50	46	126	33	1.0
8-837-22	22	6.5	86	22	26	58	53	148	38	1.5
8-837-26	26	8.5	96	26	28	69	61	166	44	2.3
8-837-28	28	9.5	111	28	32	74	68	190	46	3.2
8-837-32	32	12	121	32	36	84	76	210	54	4.5
8-837-36	36	13.5	134	36	38	92	84	232	59	6.3
8-837-38	38	17	146	38	45	99	92	254	60	8.1
8-837-45	45	25	178	47	51	127	106	313	73	16.3
8-837-50	51	35	197	53	57	146	122	347	83	23.2